




Augenti®
LIGHTING



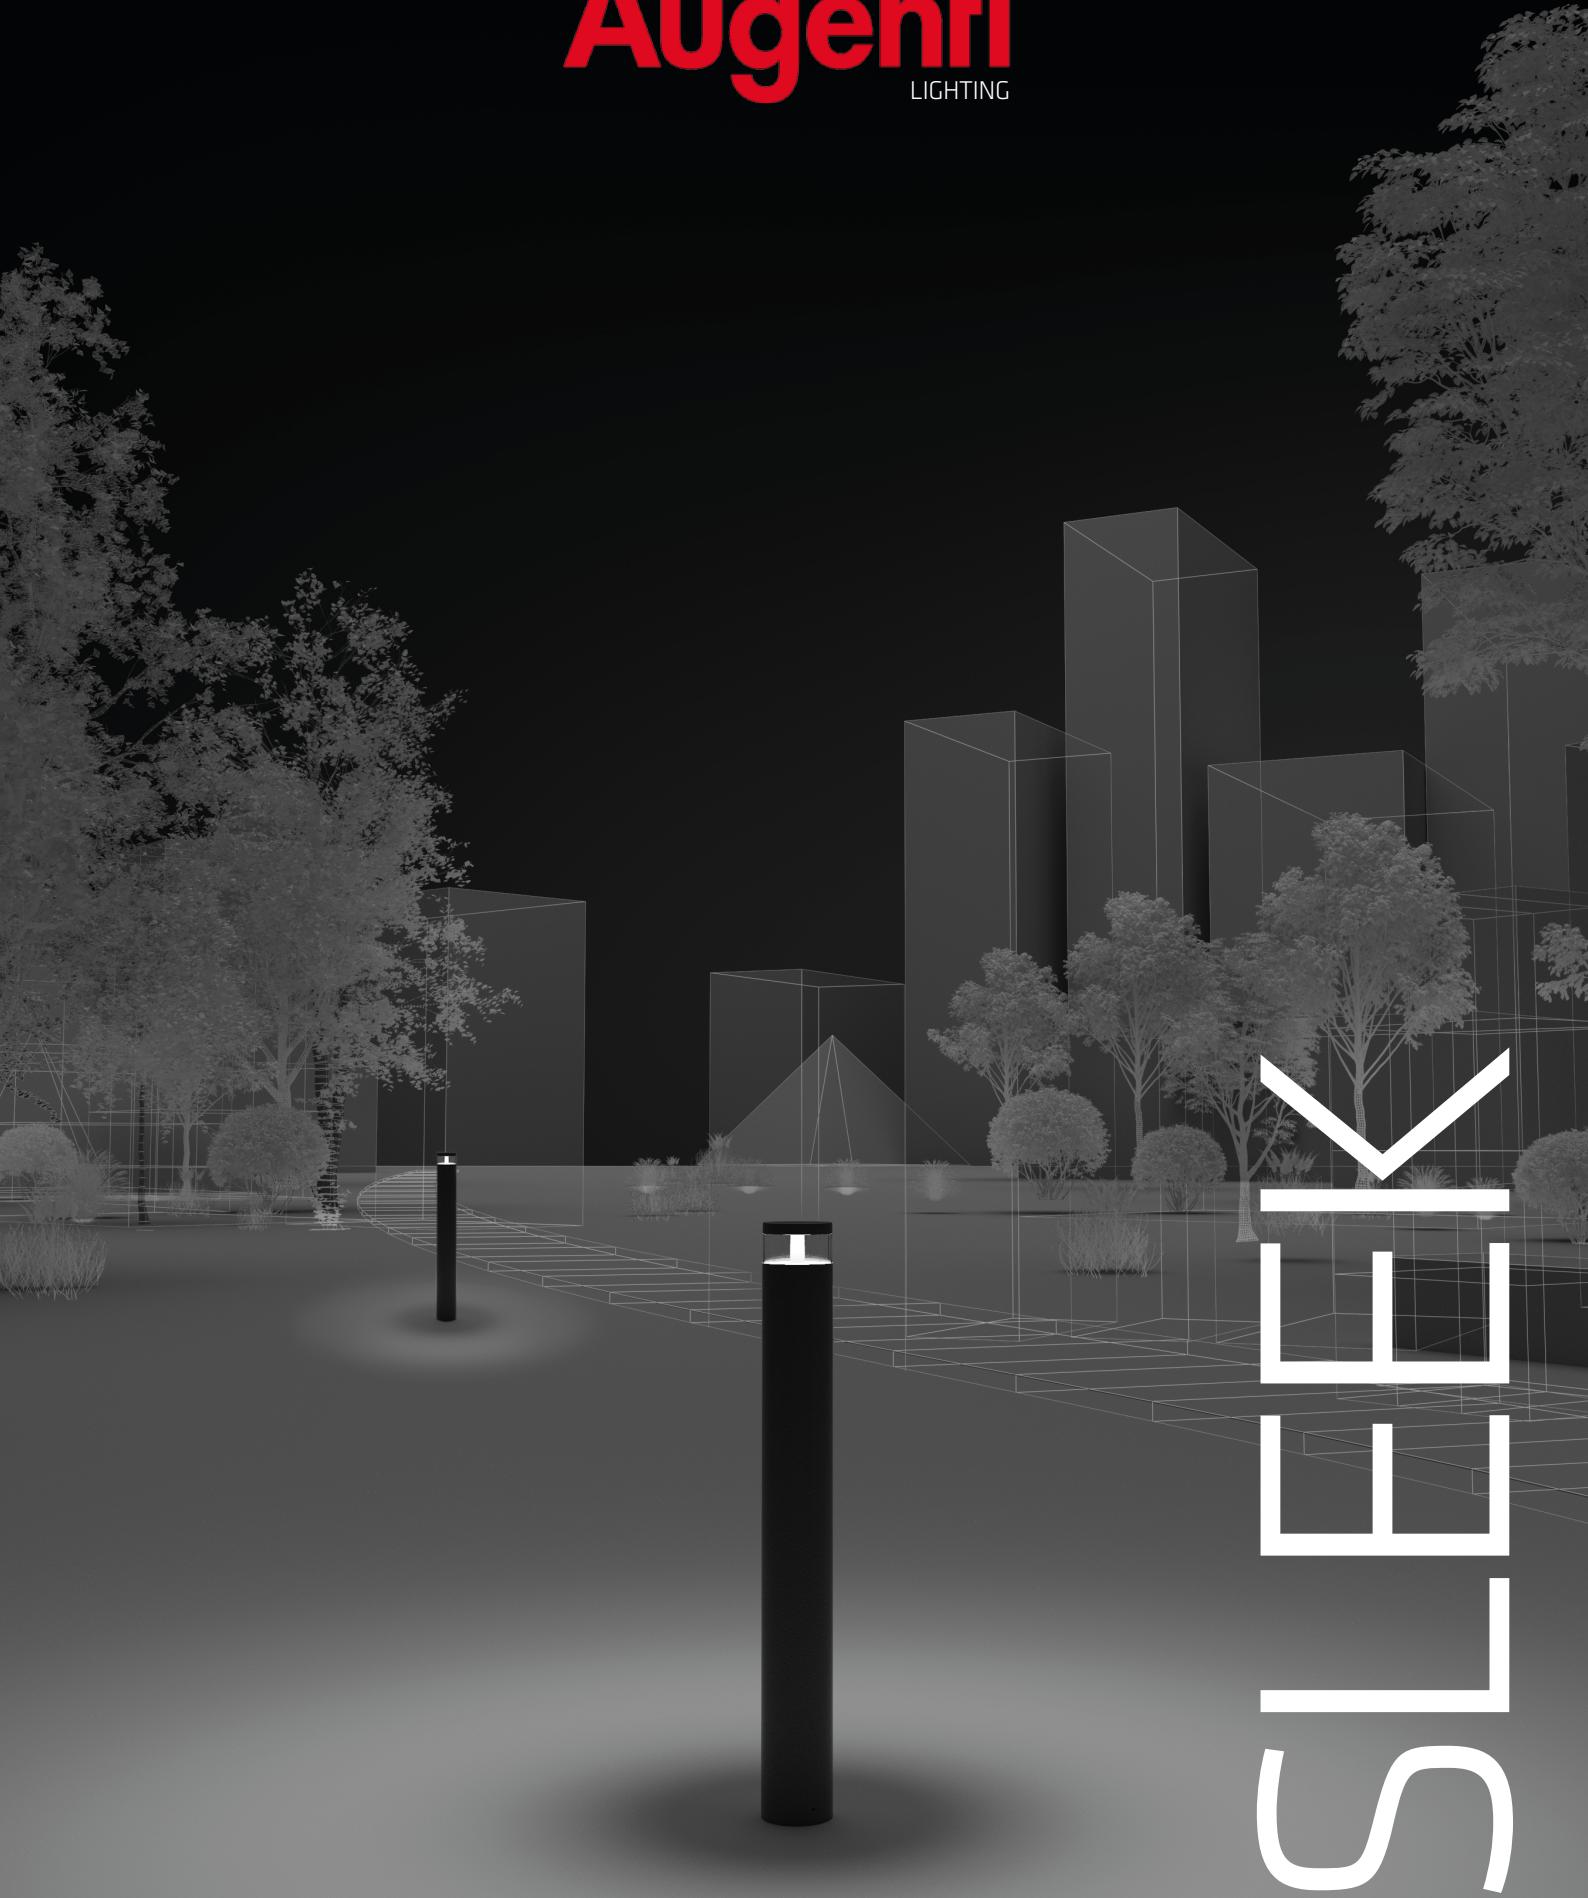

ELEGANCE
UNFOLDS IN
THE SUBTLETY
OF PERFECT
LIGHTING

SLEEK collection

SLEEK collection

Coniugando armoniosamente stile e praticità, **Sleek** si distingue per la sua presenza discreta e la sua capacità di trasformare qualsiasi ambiente in un'esperienza visiva incantevole. Le sue **linee pulite** e le **dimensioni compatte** rappresentano un omaggio alla versatilità, consentendone una facile integrazione in ogni spazio esterno.


Il cuore di questo prodotto è il risultato di un know-how aziendale accumulato attraverso anni di ricerca e innovazione. In un mondo in cui la forma e la funzione si incontrano in perfetta armonia, il nostro Sleek rappresenta il connubio perfetto tra **design** e **prestazioni di alto livello**, che garantiscono un'illuminazione di alta qualità e un'esperienza durevole.

Harmoniously combining style and practicality, **Sleek** stands out for its discreet presence and its ability to transform any environment into an enchanting visual experience. Its **clean lines** and **compact size** are a tribute to versatility, allowing it to be easily integrated into any outdoor space.

The heart of this product is the result of a company know-how accumulated through years of research and innovation. In a world where form and function come together in perfect harmony, our Sleek is the perfect combination of **design** and **high-end performance**, ensuring high-quality lighting and a long-lasting experience.

Alliant harmonieusement style et praticité, **Sleek** se distingue par sa présence discrète et sa capacité à transformer n'importe quel environnement en une expérience visuelle enchanteresse. Ses **lignes épurées** et ses **dimensions compactes** rendent hommage à la polyvalence, en permettant une intégration facile dans tous les espaces extérieurs.

Le cœur de ce produit est le résultat d'un savoir-faire d'entreprise accumulé grâce à des années de recherche et d'innovation. Dans un monde où la forme et la fonction se rencontrent en parfaite harmonie, notre Sleek représente la combinaison parfaite entre **design** et **performances de haut niveau**, garantissant un éclairage de haute qualité et une expérience durable.

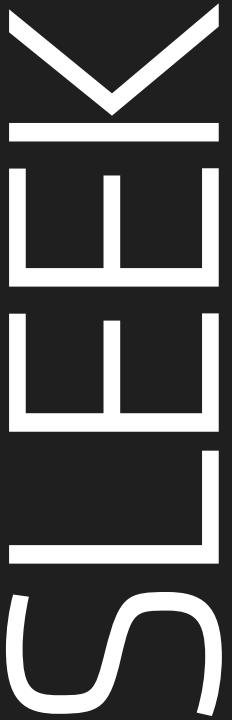

collection



Augenti®

3/Sleek Collection

CASAMBI

READY TO CONNECT

Casambi è una tecnologia **smart lighting** che sfrutta la rete wireless **Bluetooth** Low Energy (BLE) per gestire e regolare le luci in modo intelligente. Grazie alla sua natura “**ready to connect**”, Casambi può essere facilmente integrato in qualsiasi ambiente senza la necessità di complesse configurazioni. Questa soluzione consente agli utenti di controllare facilmente e in modo personalizzato l’illuminazione tramite smartphone o tablet. Grazie alla sua **flessibilità**, Casambi si distingue come una soluzione versatile ed efficiente per l’illuminazione domestica e professionale.

Casambi is a **smart lighting** technology that uses **Bluetooth** Low Energy (BLE) wireless network to intelligently manage and control lights. Due to its “**ready to connect**” nature, Casambi can be easily integrated into any environment without the need for complex configurations. This solution allows users to easily and individually control lighting via smartphone or tablet. Thanks to its **flexibility**, Casambi stands out as a versatile and efficient solution for home and professional lighting.

Casambi est une technologie d’**éclairage intelligent** qui utilise le réseau sans fil **Bluetooth** Low Energy (BLE) pour gérer et régler intelligemment l’éclairage. Grâce à sa nature “**prêt à connecter**”, Casambi peut être facilement intégré dans n’importe quel environnement sans avoir besoin de configurations complexes. Cette solution permet aux utilisateurs de contrôler facilement et de manière personnalisée l’éclairage à l’aide d’un smartphone ou d’une tablette. Grâce à sa **flexibilité**, Casambi se distingue comme une solution polyvalente et efficace pour l’éclairage domestique et professionnel.



Comunicazione Wireless Bluetooth

Wireless Bluetooth Communication
Communication Sans Fil Bluetooth



Costo ridotto

Reduced cost
Coût réduit



Installazione Semplice

Easy Installation
Installation Simple



Interfaccia Utente Intuitiva

User-Friendly Interface
Interface Intuitive




Programmabile

Programmable
Programmable



Espandibile

Expandable
Extensible

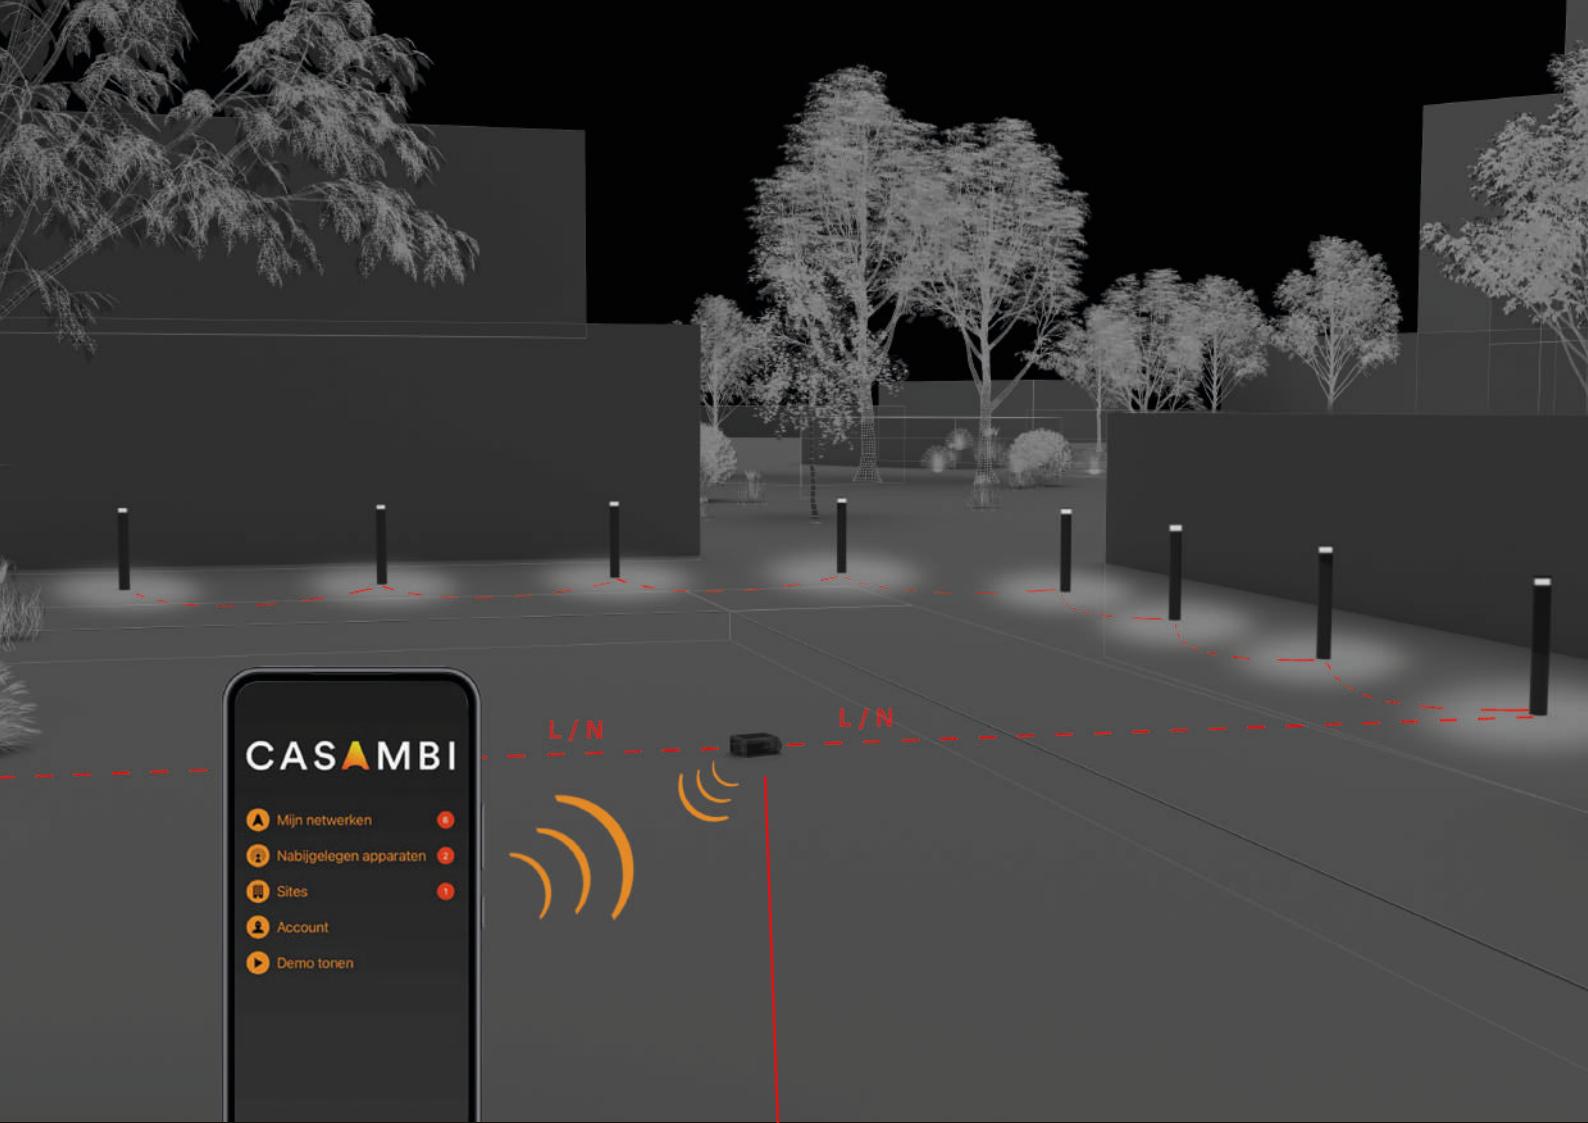

Augenti[®] REMOTE CASAMBI

SEMPLICITY
CONNECTIVITY
FLEXIBILITY
EXPANDABILITY

SUSTAINABLE


PROGRAMMABLE

SMART LIGHTING
ECONOMIC ADVANTAGE

WIRELESS

ADAPTABLE


BLUETOOTH




Collection




SLEEK
420F0



SLEEK
420F1

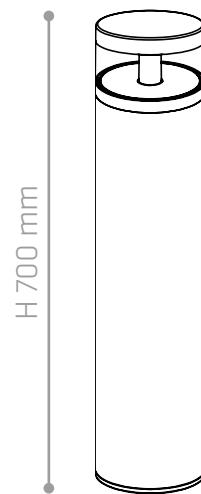

SLEEK
420F2

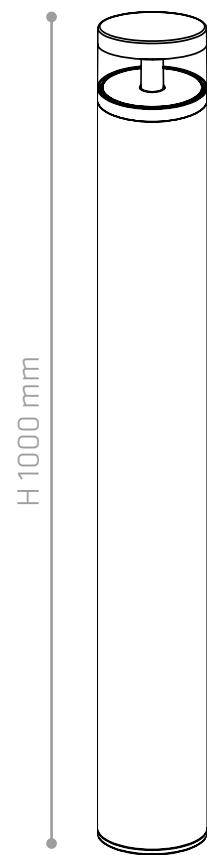

Fixture Specifications



Protection . IP 65 - IK 10

Body . Extruded aluminium alloy

Screen . Transparent polycarbonate

Seals . Closed-cell EPDM rubber


Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

Finishes



00
PURE WHITE
RAL 9016




10
WHITE
RAL 9010



24
BRONZE



25
RUST



01
BLACK
RAL 9005



30
ANTHRACTITE



35
SLATE GREY





40
GREY
RAL 9006

Assembly

Ground connection system with anchoring brackets to be ordered separately.

The orientation is independent of the layout of the ground fixing holes.

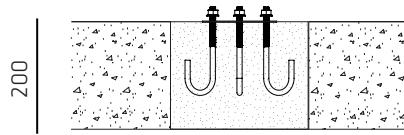

Residential areas



Cycle
Pedestrian paths



Access areas



Parks
Gardens

Application

Specifications



IP65



IK10



CE



READY
TO CONNECT



READY
TO CONNECT



website-link

SLEEK

Small Poles H200 mm - led WHITE


LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI	Dimmer system
420F0 /HR50PT	360°	I	15	2100 lm	700 lm	2700K	80	Not dimmable
420F0 /WR50PT	360°	I	15	2100 lm	700 lm	3000K	80	Not dimmable
420F0 /NR50PT	360°	I	15	2200 lm	730 lm	4000K	80	Not dimmable
420F0 /HT50PT	360°	I	15	2100 lm	700 lm	2700K	80	TRIAC
420F0 /WT50PT	360°	I	15	2100 lm	700 lm	3000K	80	TRIAC
420F0 /NT50PT	360°	I	15	2200 lm	730 lm	4000K	80	TRIAC
420F0 /HD50PT	360°	I	15	2100 lm	700 lm	2700K	80	DALI-2 integrated
420F0 /WD50PT	360°	I	15	2100 lm	700 lm	3000K	80	DALI-2 integrated
420F0 /ND50PT	360°	I	15	2200 lm	730 lm	4000K	80	DALI-2 integrated

Accessories


informazioni sugli accessori sul nostro sito web
Information about accessories on our website

SURGE PROTECTION



KIT CASAMBI

IP67



CASAMBI

Only for TRIAC version




Assembly
Ground installation

Ground connection system with anchoring brackets to be ordered separately

Input Supply 220-240Vac 50/60Hz

-Ø120-



Specifications



Quote espresse in millimetri "mm"
Share expressed in millimeters "mm"

Sizes . H200 x Ø120

SLEEK

Small Poles H700 mm - led WHITE


LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI	Dimmer system
420F1/HR50PT	360°	I	15	2100 lm	700 lm	2700K	80	Not dimmable
420F1/WR50PT	360°	I	15	2100 lm	700 lm	3000K	80	Not dimmable
420F1/NR50PT	360°	I	15	2200 lm	730 lm	4000K	80	Not dimmable
420F1/HT50PT	360°	I	15	2100 lm	700 lm	2700K	80	TRIAC
420F1/WT50PT	360°	I	15	2100 lm	700 lm	3000K	80	TRIAC
420F1/NT50PT	360°	I	15	2200 lm	730 lm	4000K	80	TRIAC
420F1/HD50PT	360°	I	15	2100 lm	700 lm	2700K	80	DALI-2 integrated
420F1/WD50PT	360°	I	15	2100 lm	700 lm	3000K	80	DALI-2 integrated
420F1/ND50PT	360°	I	15	2200 lm	730 lm	4000K	80	DALI-2 integrated


Accessories

informazioni sugli accessori sul nostro sito web
information about accessories on our website

SURGE PROTECTION



KIT CASAMBI IP67



CASAMBI

Only for TRIAC version



Assembly
Ground installation


Ground connection system with anchoring brackets to be ordered separately

Input Supply 220-240Vac 50/60Hz

Specifications



—Ø120—

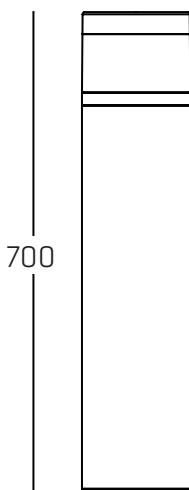

Quote espresse in millimetri "mm"
Share expressed in millimeters "mm"

Sizes . H700 x Ø120

SLEEK

Small Poles H1000 mm - led WHITE


LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI	Dimmer system
420F2/HR50PT	 360°	I	15	2100 lm	700 lm	2700K	80	Not dimmable
420F2/WR50PT	 360°	I	15	2100 lm	700 lm	3000K	80	Not dimmable
420F2/NR50PT	 360°	I	15	2200 lm	730 lm	4000K	80	Not dimmable
420F2/HT50PT	 360°	I	15	2100 lm	700 lm	2700K	80	TRIAC
420F2/WT50PT	 360°	I	15	2100 lm	700 lm	3000K	80	TRIAC
420F2/NT50PT	 360°	I	15	2200 lm	730 lm	4000K	80	TRIAC
420F2/HD50PT	 360°	I	15	2100 lm	700 lm	2700K	80	DALI-2 integrated
420F2/WD50PT	 360°	I	15	2100 lm	700 lm	3000K	80	DALI-2 integrated
420F2/ND50PT	 360°	I	15	2200 lm	730 lm	4000K	80	DALI-2 integrated

Accessories

informazioni sugli accessori sul nostro sito web
Information about accessories on our website

SURGE PROTECTION




KIT CASAMBI
IP67



CASAMBI

Only for TRIAC version

—Ø120—

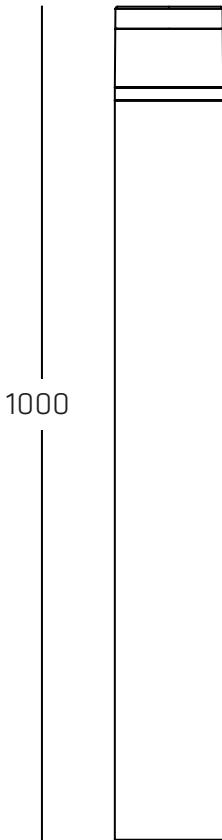

Assembly
Ground installation

Ground connection system with anchoring brackets to be ordered separately

Input Supply 220-240Vac 50/60Hz


Specifications



Quote espresse in millimetri "mm"
Share expressed in millimeters "mm"

Sizes . H1000 x Ø120




SLEEK

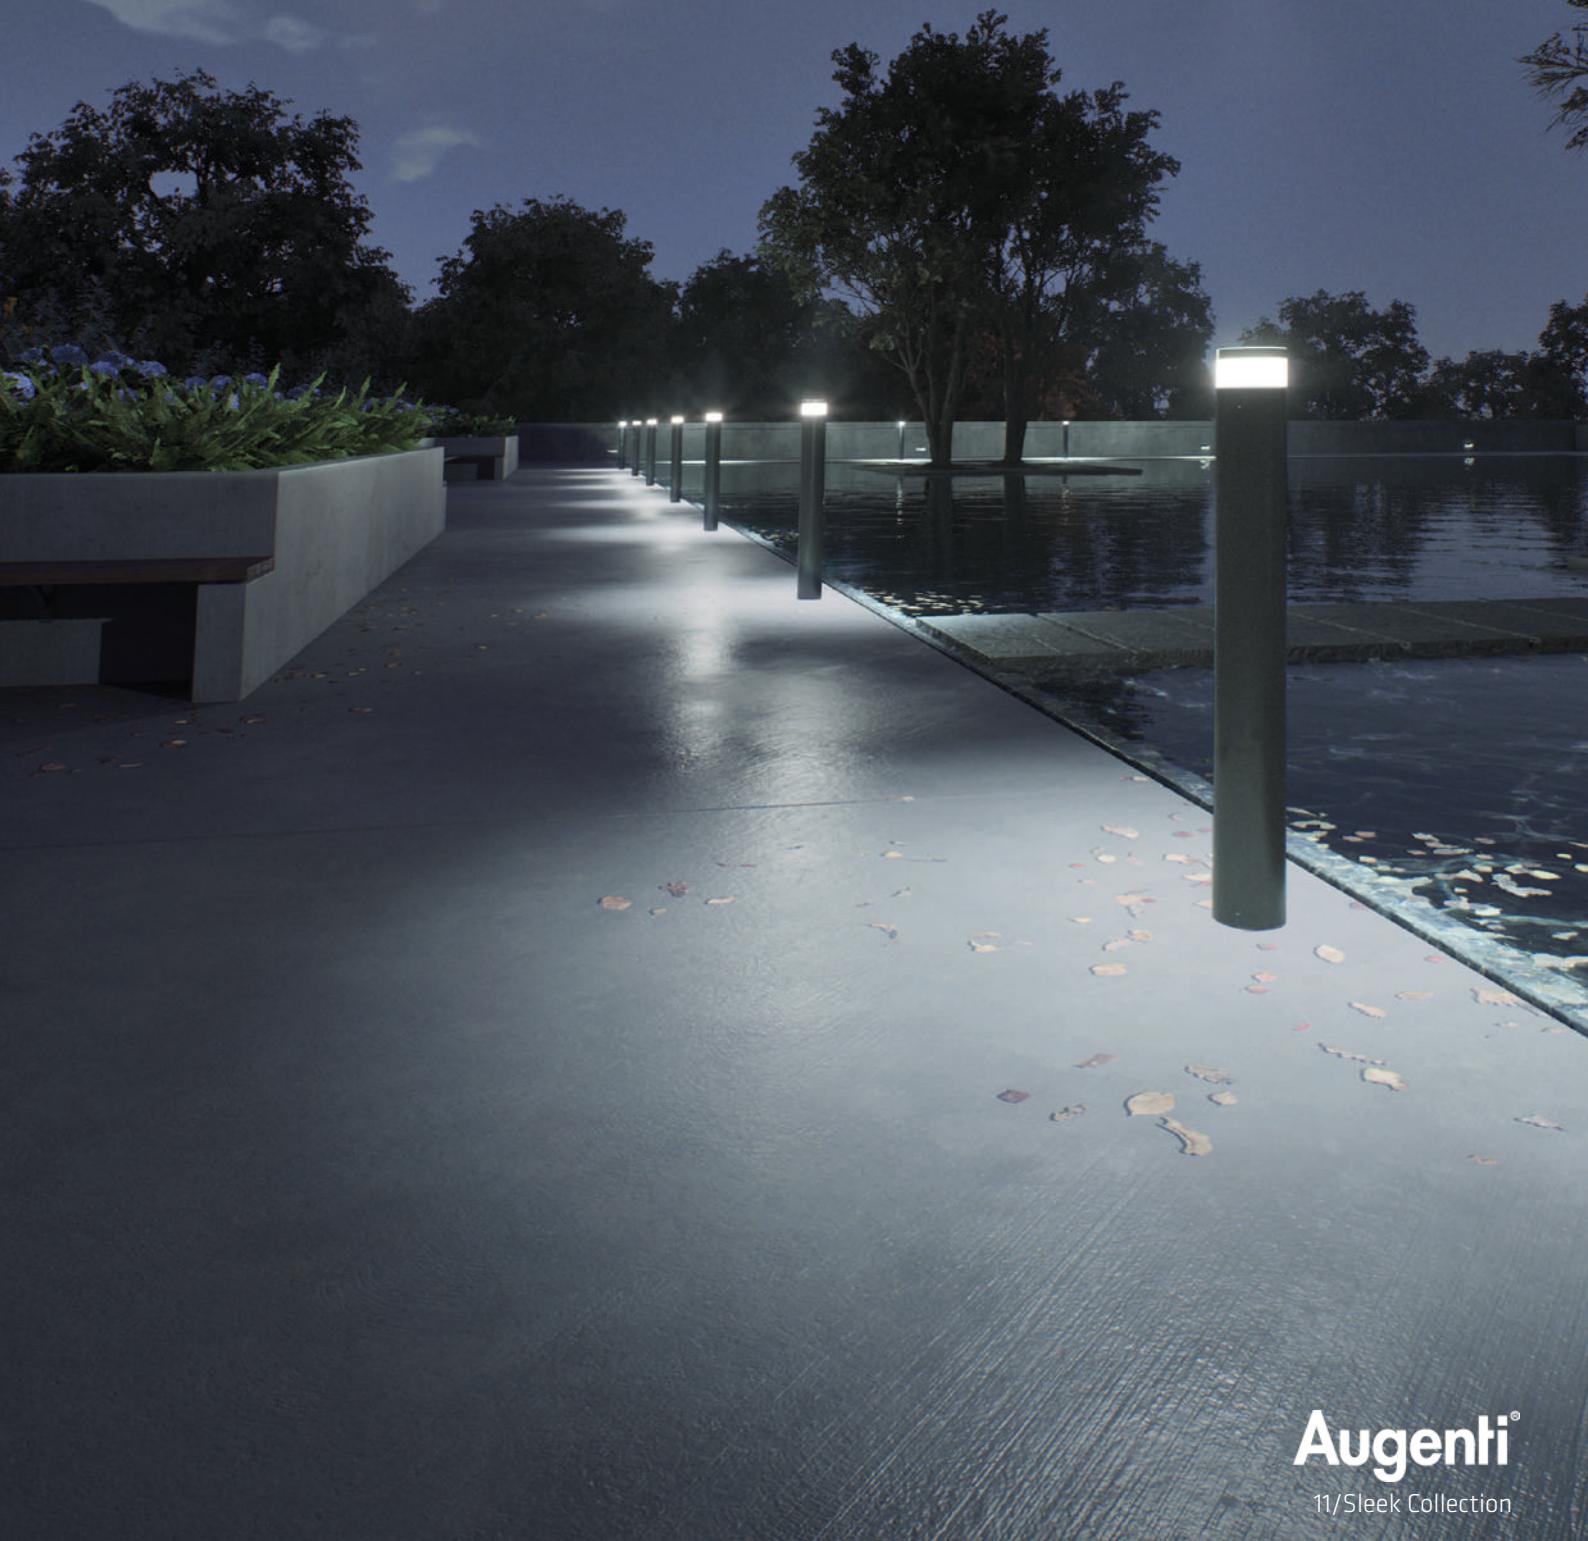

Augenti®

11/Sleek Collection

SLEEK light diffusion

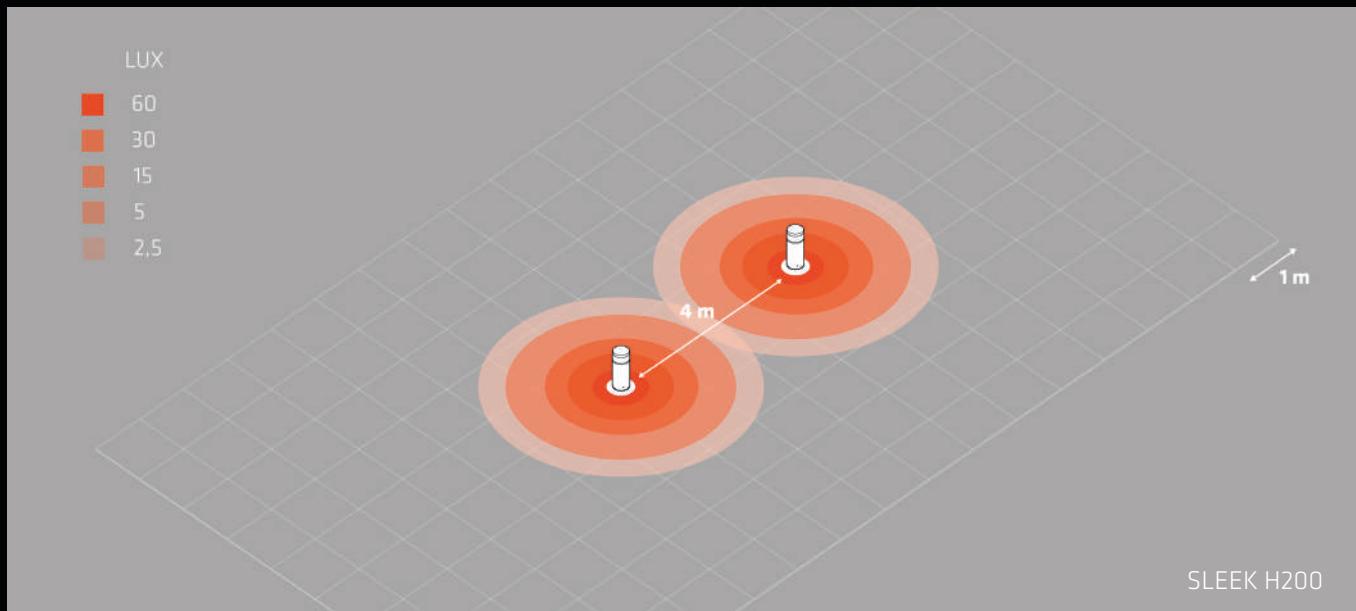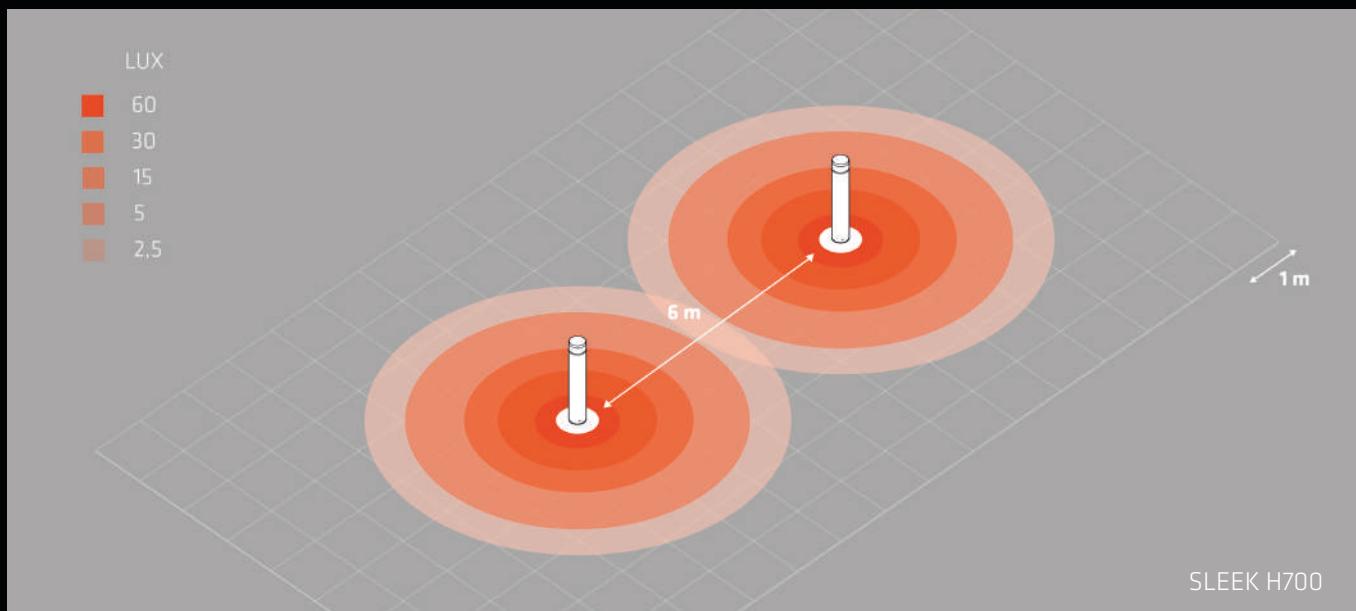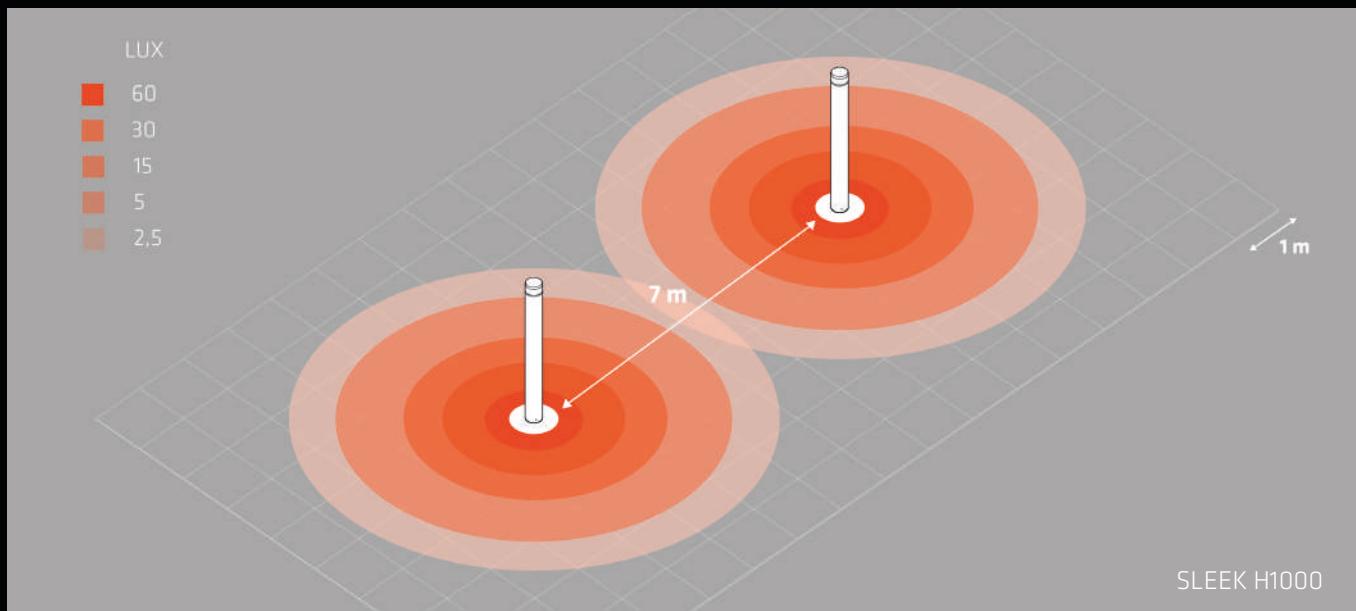



Augenti®
13/Sleek Collection

SLEEK

collection



Augenti®
15/Sleek Collection



SLEEK
GOOD
INSTALLATION
BY **Augenti[®]**
LIGHTING


Augenti®
LIGHTING



AUGENTI LIGHTING S.R.L. UNIPERSONALE

Via Francesco Lana, 31 - 25065 Lumezzane (BS) Italy - tel: (+39) 030 7282524 - fax: (+39) 030 7281879
info@augentilighting.it - www.augentilighting.it